

XS E25 Nozzles



XS E25

CONVENTIONAL ETHANOL FUELING

Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

- XS E25 nozzle shuts off when:
 - the pump shuts off.
 - the gas tank is full.
 - the lever is opened before the pump is turned on.
 - the leak detector has not completed the test cycle.
- Stainless steel reinforced spout bushing keeps spout tip round, and acts as a captive fastener to prevent tip-end sensor damage.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill neck or raises above the horizontal.
- *StreamShaper®* reduces turbulence for straighter fuel flow and less splash back spillage.
- New poppet seal design in conjunction with new tilt poppet design improves flow control ("to-the-penny" dispensing) and provides enhanced endurance over time.
- Optional cold weather seals are rated to -40° F/C.
- Optional Gilbarco, Tokheim, and Wayne handguards can be fitted with a magnet to trigger the dispenser's proximity switch, or can be provided without the magnet for dispensers equipped with a standard "flapper" switch.
- All seals are UL approved fluorocarbon compounds to prevent degradation from Ethanol blends.
- Compatible with unleaded and all Ethanol blends through E-25.
- Comes standard with smooth full grip guard.
- ADA-compliant EZ Lever reduces the force required to open the main poppet valve by 50%, resulting in a lever operating force ≤5 lbs.

New Unleaded Nozzles with NPT Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1108459	with Two Notch Hold Open Clip, 1808 Waffle Splash Guard and Cold Weather Seals	3.1 (1.4)
1108689	with Single Notch Hold Open Clip, POPD®s and 1808 Waffle Splash Guard	3.2 (1.5)
11086179	with Single Notch Hold Open Clip and 1808 Waffle Splash Guard	3.1 (1.4)
1108659	with Two notch hold open clip and 1808 Waffle Splash Guard	3.1 (1.4)
E1108604	with Two Notch Hold Open Clip, Mate Guard and Polymer Handle Cover	3.0 (1.4)
E1108659	with Two Notch Hold Open Clip, Mate Guard, Polymer Handle Cover and 1808 Waffle Splash Guard	3.1 (1.4)



MODEL NO.
1108459





WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



XS E25 Nozzles


Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

Dimensions

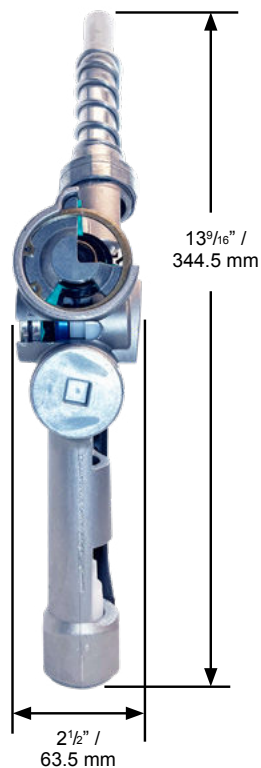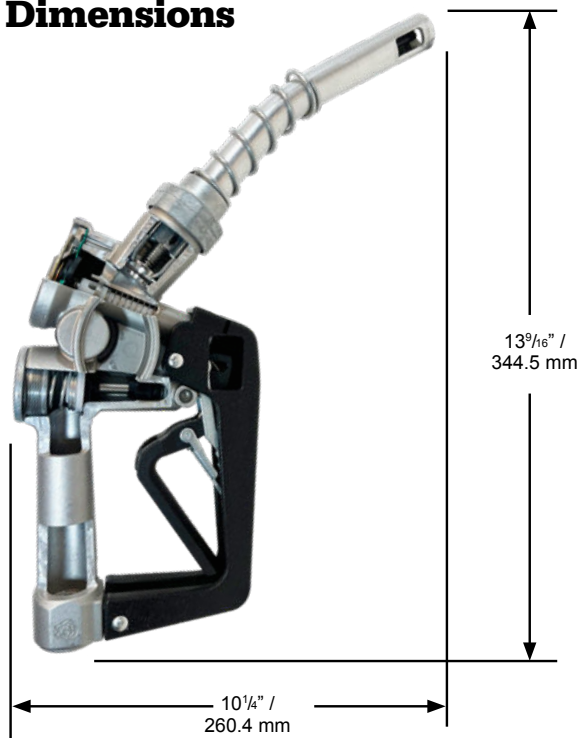

Construction

Body	Die cast aluminum with high-impact polymer handguard
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber-reinforced Teflon®
Lever	Two piece polymer EZ Lever
Inlet	3/4" (19 mm) NPT or 3/4" (19 mm) BSP

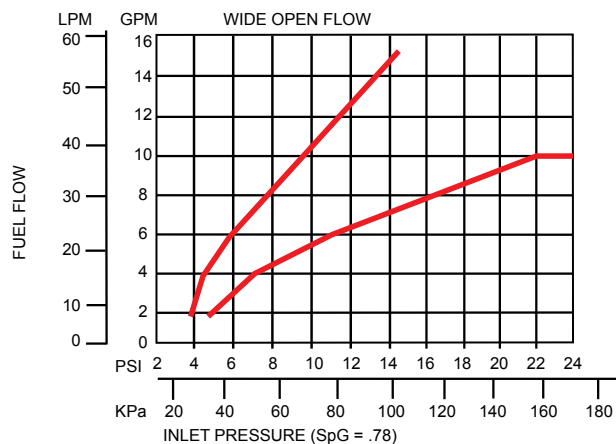



XS E25 Nozzles

Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

Nozzle Options

Nozzle Guard Options

Full Grip Guard

POPD®S
Full Grip Guard

POPD®H
Full Grip Guard

Mate Guard

POPD®S
Mate Guard


POPD®H
Mate Guard



Waffle Guard Options

1807 Waffle Guard

1808 Waffle Guard

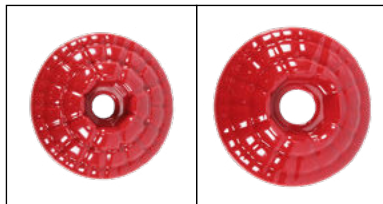

Handguard Options

Standard Polymer
Handguard

Gilbarco Polymer
Handguard
(with or without Magnet)

Tokheim Polymer
Handguard
(with or without Magnet)


Wayne Polymer
Handguard
(with or without Magnet)



Lever Options

Lever without Hold
Open Clip


Lever with Hold
Open Clip

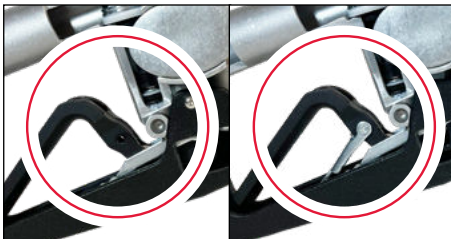

Latch Plate Options

1 - Position Latch Plate

2 - Position Latch Plate

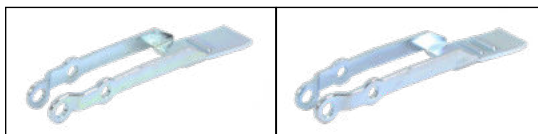



XS E25 Nozzles

Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
006273	3/4" F x 3/4" F Non-Reconnectable E85 Safe-T-Break® Trebuchet MS
006360^	3/4" F x 3/4" F Reconnectable E25/E85 Safe-T-Break®

Spouts

MODEL NO.	DESCRIPTION
006207	Unleaded E85 Spout Assembly

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
000397	Unleaded Spout Gauge
007089	Nozzle Service Kit
007490	Internal Flo-Equalizer® - 10 gpm / 37.9 Lpm

Swivels

MODEL NO.	DESCRIPTION
006350^	3/4" M x 3/4" F NPT Multi-Plane E85 Swivel

Guards

MODEL NO.	DESCRIPTION
001506	Protection Package
001806	Full Grip Reguard
001807	Waffle Splash Guard with Small Hole
001808	Waffle Splash Guard
001809	Reguard Protection Package
003440	Mate Easy-On Package
003795	Mate Guard
004145	Full Grip Guard
006628	POPD® S Clear Cover
006665	POPD® S Full Grip Guard
007205	POPD® S Full Grip Reguard
007361	Black Handle Cover
007999	POPD® H Clear Cover
008165	POPD® S Mate Guard
008166	POPD® H Mate Guard
008175	POPD® EZS Nozzle Guard
008176	POPD® EZH Nozzle Guard
008185	POPD® H Full Grip Guard
008192	POPD® H Full Grip Reguard
014524	International Mate Package
014530	International Mate Guard
015247	International POPD® H Mate Guard
015253	International POPD® H Mate Package

Guard Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR <i>CUSTOM</i>	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 <i>CUSTOM</i>
Red	-02	Silver	-09	Apple Green	-18 <i>CUSTOM</i>
Green	-03	BP Green	-16	Purple	-19 <i>CUSTOM</i>
Black	-04	M Blue	-21	Pink	-20 <i>CUSTOM</i>
Yellow	-05	Orange	-39	BPS Green	-22 <i>CUSTOM</i>
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number.
Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01).
For custom colors, a minimum order of 4,000 guards will be required.



2325 Husky Way • Pacific, MO 63069
(800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.