

PCM4200 SERIES - COLLAR MOUNT TANK SUMPS

CUL US LISTED UL2447

Mounting a tank sump on a collar is the most highly recommended method of installation, and PCI's PCM Series is the most economically sized tank sump to get the job done. The PCM4200 series is engineered with the same features and benefits as its larger counterparts.

COST-EFFECTIVE

Without compromising quality or functionality, the PCM4200 Series is the most affordable fiberglass sump of its kind on the market and reduces overall installation costs.

OCTAGON BASE

The octagon base provides flat sealing surfaces for 45° and 90° penetrations, allowing for a faster installation using standard penetration and pipe fittings.

TWIST-LOK ACCESS COVER

PCI's tank sumps and below grade transition sumps come standard with the latest generation of our innovative 'Twist-Lok' Access Cover. Constructed from injection molded fiberglass, Twist-Lok lids provide a watertight seal with a quick and easy 12° turn.

'BRITE-WHITE' INTERIOR

Our signature 'Brite-White' interior reflects light for better visibility and makes identifying leak points easier.

DUO-MOLDED TECHNOLOGY

Our fiberglass sumps utilizes Duo-Molded Technology. Using premium raw materials with a high glass content, we create two layers of fiberglass, offering superior strength and fuel resistance.







PCM4248-3C0











PCM4200 SERIES - COLLAR MOUNT TANK SUMPS





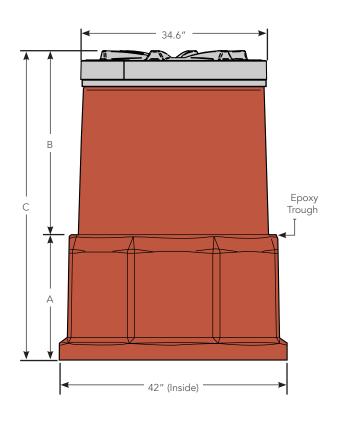

PRODUCT SIZES			
Part No.	Base Height (A)	Adjustable Height (B)	Overall Height (C)
PCM4233	23"	6" - 10"	29" - 33"
PCM4248	23"	7" - 25"	30" - 48"
PCM4255	23"	7" - 32"	30" - 55"
Options (Example: PCM42XX-XXX)			
-3C0	42" Collar Mount, No Bonding Kit		
-3C2	42" Collar Mo	ount, (x2) E148C	M Epoxy Kits

Optimum lid height is 4" below manhole cover

PART NUMBER LEGEND			
-	0: No Bonding Kit 2: (x2) E148 Epoxy Kits : Twist-Lok		



INSPECTION PORT

Optional 4" inspection port allows quick and easy inspection without removing entire cover. IP4000-1

